
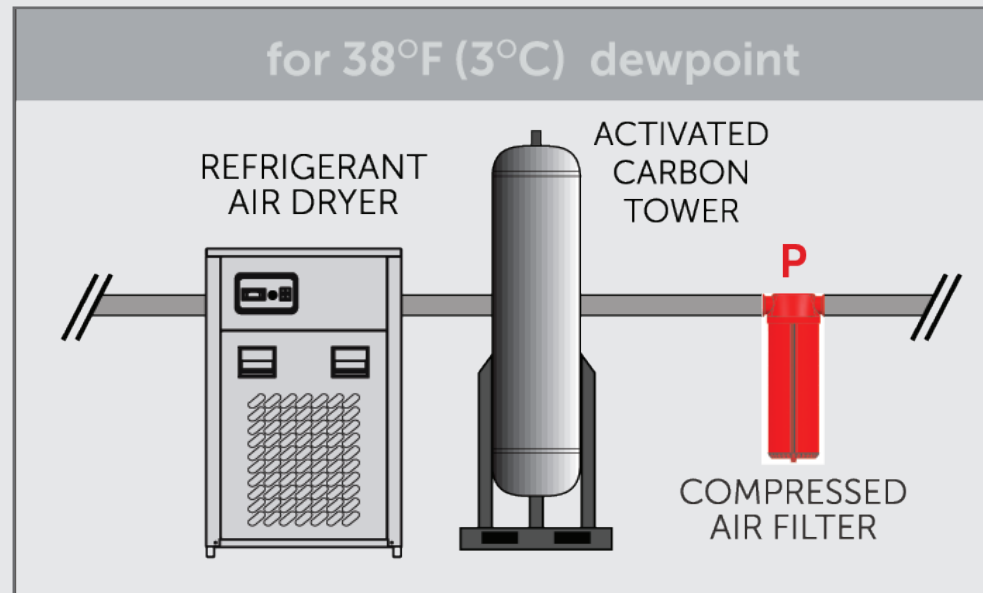


OELM Series High Efficiency Mist Eliminating Air (Mist Eliminator)

Technical Specifications OELM (150-12000 scfm)

Model	Capacity scfm	Coupling Size Drain Port	Coupling Size Inlet/Outlet	Max Working Pressure psi	Housing Dimensions (inch)							
					A	B	C	D	ØE	ØF	G	H
OELM-150	150	1/2"	2" Flange	200	19,70	39,87	8,34	18,20	17,00	4,00	12,00	13,00
OELM-300	300	1/2"	2" Flange	200	19,70	43,87	8,34	22,20	17,00	4,00	16,00	17,00
OELM-600	600	1/2"	2" Flange	200	19,70	57,87	8,34	36,20	17,00	4,00	30,00	31,00
OELM-800	800	1/2"	3" Flange	200	19,70	65,27	11,10	42,80	17,00	4,00	36,00	37,00
OELM-1200	1200	1/2"	3" Flange	200	23,60	60,17	11,15	36,75	19,00	4,00	30,00	31,00
OELM-1600	1600	1/2"	3" Flange	200	23,60	66,17	11,15	42,85	19,00	4,00	36,00	37,00
OELM-2100	2100	1/2"	4" Flange	200	27,56	62,42	13,30	37,50	22,30	5,00	30,00	31,00
OELM-2750	2750	1/2"	4" Flange	200	27,56	68,42	13,30	43,43	22,30	5,00	36,00	37,00
OELM-4200	4200	1/2"	6" Flange	200	31,50	65,67	15,40	38,63	24,30	7,10	30,00	31,00
OELM-6000	6000	1/2"	6" Flange	200	31,50	75,67	15,40	48,67	24,30	7,10	37,40	41,00
OELM-8000	8000	1/2"	8" Flange	200	33,50	79,42	16,30	50,20	26,30	9,17	40,00	41,00
OELM-10000	10000	1/2"	10" Flange	200	39,40	83,47	18,90	51,55	30,30	13,20	40,00	41,00
OELM-12000	12000	1/2"	12" Flange	200	39,40	105,92	19,65	72,80	30,30	13,20	60,00	61,00

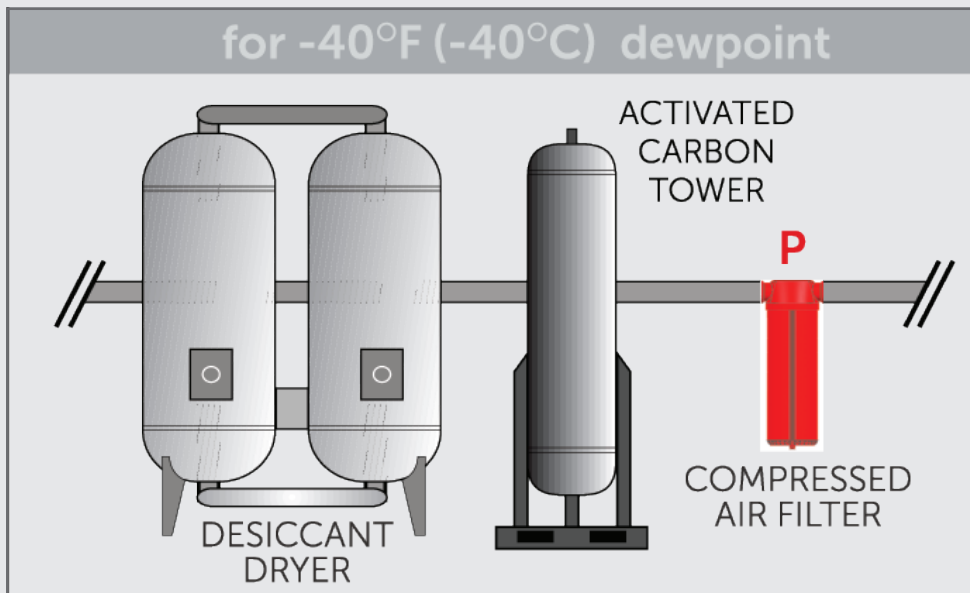

CORRECTION FACTORS FOR ODRD DRYERS								
Operating Pressure (barg)	1	3	5	7	9	11	13	14
PSIG	15	44	73	100	130	160	189	200
X1	0,50	0,71	0,87	1,00	1,12	1,22	1,32	1,38

DRAIN TYPE
Electro-adjustable
External float type
Zero-loss drain
Manual